




Elastofalt® DR

Type

Elastofalt DR is a bitumen rubber coating based on cationic emulsion. Elastofalt DR creates after drying a high top layer with optimal adhesion to bituminous surfaces.

Use

Recoverable and preventive maintenance of disintegrated roofs. Application is possible on flat and sloped roofs. Elastofalt DR is used on modern modified roofing-felts. Because Elastofalt DR is free of solvents there will be no softening of the subbase

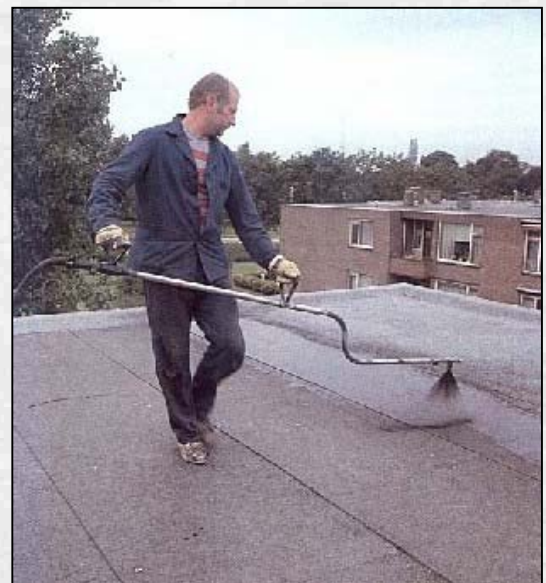

Product and characteristics

Elastofalt DR must be applied with a squeegee or soft-haired broom. For large surfaces Elastofalt DR can be sprayed by means of a special pump. Immediately after application slate chippings will be strewn in the wet Elastofalt DR. After totally drying the excess slate chippings are removed.